



Jabfloor 70, 100, 150, 200, 250

Floor insulation – over slab with chipboard finish

Jabfloor is a closed cell expanded polystyrene (EPS) insulation panel for use in all floor constructions.

A range of compressive strengths are available to suit all building types from domestic to industrial.

Approved by BBA as Jablite Floor Insulation - Certificate number 87/1796.

For domestic applications 18mm thick Type P5 chipboard to BS EN 312 may be used. Further details and information for non-domestic floors are given in our installation information.

Jabfloor can be used in temperatures up to 80°C. It is therefore suitable for use with underfloor heating systems.

There are no requirements for special PPE when installing or cutting Jabfloor. (full installation details are shown later)



Dimensions

Standard Size	2400 x 1200mm
Standard Thickness	25, 30, 40, 50, 60, 75, 100, 120, 150 and 200mm (Other thicknesses available to order)

Properties :

Grade	Thermal Conductivity (Lambda) (W/mK)	Design load at 1% nominal compression (kPa)	Design load at 10% nominal compression (kPa)
Jabfloor 70	0.038	20	70
Jabfloor 100	0.036	45	100
Jabfloor 150	0.035	70	150
Jabfloor 200	0.034	90	200
Jabfloor 250	0.034	100	250





Application : This information is provided as a guideline, please refer to the Jabfloor compressive strengths table. The recommendations of BS EN 1991-1-1 and BS EN 1990 should be followed in the design of the floor

Grade	Application
Jabfloor 70	Domestic
Jabfloor 100	Offices, Special Occupancy Residential (e.g. Care Home)
Jabfloor 150	Public, Government and Educational Buildings
Jabfloor 200	Industrial and Commercial
Jabfloor 250	Industrial, Cold Store, Heavy Commercial

Accreditation :

BBA	Jabfloor Insulation has been assessed and approved by the British Board of Agrément as Jablite Floor Insulation for use over slab with a chipboard finish in ground bearing floors. Certificate number 87/1796. This Certificate covers Grades 70, 100 and 150.
NHBC Approved	NHBC accepts the use of Jablite Floor Insulation, provided it is installed, used and maintained in accordance with the BBA Certificate, in relation to NHBC Standards, Chapters 5.1 Substructure and ground bearing floors and 5.2 Suspended ground floors
CE marking	Jablite have taken the responsibility of CE marking the product in accordance with harmonised European Standard BS EN 13163 : 2012. Declaration of Performance is available on Request.
Quality	All Jablite products are manufactured in production facilities which are certified to ISO 9001 Quality Management
Environmental Responsibility	All Jablite manufacturing facilities are ISO 14001 certified. We operate an Environmental Management System which includes our supply chain (see BREEAM section for more information)
Compliance	Jabfloor conforms to the required properties as defined in BS EN 13163:2012 – Thermal insulation products for buildings – Factory made expanded polystyrene (EPS) products – Specification
Fire	Solid ground floors are not required to provide fire resistance. When properly installed Jabfloor is fully protected by the chipboard floor finish and will have no adverse effect on the fire performance of the building into which it is installed. Jabfloor is supplied as non-flame retardant material as standard. Euroclass E, flame-retardant material is available to order.





Environment and Sustainability :

A+	Jabfloor insulation is manufactured from EPS (expanded polystyrene) which has an A+ rating in the BRE Green Guide to Specification.
Climate Change	<p>Jabfloor insulation has an ozone depletion potential (ODP) of zero and a global warming potential (GWP) of less than 5.</p> <p>EPS does not create any known risk to the environment</p>
100%	Jabfloor insulation is 100% recyclable and Jablite offers a site collection recycling service.
BREEAM	<p>Responsible Sourcing.</p> <p>Jablite insulation products are manufactured in factories which are ISO 14001 and ISO 9001 certified Jablite purchases raw material from suppliers who are ISO 14001 certified. The ISO certificate are in the Technical Resource Centre on the Jablite website www.Jablite.co.uk</p> <p>Key Process (Insulation Manufacture) ISO 14001: Certificate Number EMS 559414</p> <p>Supply Chain Processes (supply of materials for end products) ISO 14001: Certificate Number NL 015213-1</p> <p>Embodied Impact Jablite insulation products are made from EPS which has been given an A+ rating by the BRE.</p> <p>The calculation of embodied impact relative to thermal performance is a function of the material volume (for each build), its BRE Green Guide Rating and its thermal conductivity.</p> <p>The thermal conductivity of our products is available on both the product packaging and this datasheet</p>
Biological Properties	<p>Jabfloor EPS insulation is non-toxic and non-biodegradable.</p> <p>Jabfloor will not sustain mould growth and has no nutrient value to insects or vermin.</p> <p>Jabfloor will remain an effective insulation for the life of the building.</p>





INSTALLATION

Concrete slab

The concrete floor should have a level even surface. A tamped finish is suitable for laying Jabfloor.

Damp-proof membrane

A suitable DPM such as 1200 gauge polythene must be installed in the floor either above or below the concrete slab, (See diagrams)

If a liquid DPM is used, care should be taken that it is compatible with Jabfloor, and that it is completely dry before the insulation is laid.

Jabfloor

Jabfloor should be loose-laid over the prepared surface with board joints tightly butted.

Jabfloor may be cut with a sharp knife or fine toothed saw to fit on site.

Chipboard finish

For normal domestic floors the chipboard should be Type P5 minimum 18mm thick, with tongued and grooved edges, as described in BS EN 312.

It is important that the recommendations given in BS EN 312 are followed regarding protection of the chipboard from water spillage in bathrooms, kitchens and utility areas.


Laying should proceed from one corner of the room ensuring that a 10-12mm gap is provided at the perimeter to allow for expansion of the chipboard.

Temporary wedges should be placed in expansion gaps during laying to allow the chipboard joints to be tightened; the wedges must be removed after the adhesive has dried.


The boards should be laid with staggered joints, and all edges should be glued as laying proceeds using a PVA-based woodworking adhesive.

In corridors, or wherever there are long uninterrupted runs of flooring, the inclusion of a 20mm expansion gap at 10m centres is required in addition to the 10-12mm perimeter gap. A suitable solid timber batten should be installed beneath the expansion joint to provide support.

Damp-proof membrane above concrete slab

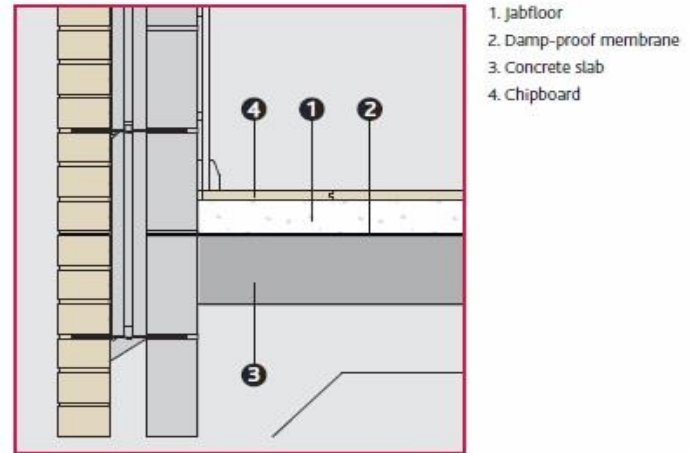

Damp-proof membrane below concrete slab

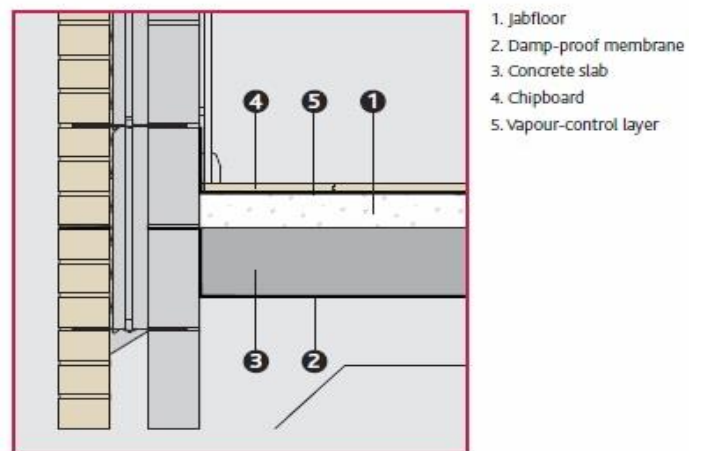



INSTALLATION

Services

It is permissible to accommodate the services within the thickness of the insulation providing the pipes etc are securely fixed to the slab.

Jabfloor should not be allowed to come into direct contact with PVC-sheathed cable, nor closer than 12mm to hot-water pipes.

Pipes should be haunched with a sand/cement mix or lagged using a proprietary material intended for this purpose.

Jabfloor may be used in direct contact with underfloor heating pipes. These pipes do not exceed the maximum working temperature of Jabfloor.

Where access is required to the services, a removable panel should be provided by cutting out an area of chipboard flooring and supporting it on battens (see diagram above).

The battens should be of preservative-treated timber, securely attached to the concrete slab using masonry nails or screws and plugs, and the chipboard screwed to the batten.


Doorways

The chipboard should be supported at external doorways by the use of a solid batten spanning at least the width of the door.

The batten should be of preservative-treated timber, securely attached to the concrete slab using masonry nails or screws and plugs.


At internal doorways, if the tongued-and-grooved joint of the chipboard is lost, a batten should be used to provide support as described above for external doorways.

Access panels

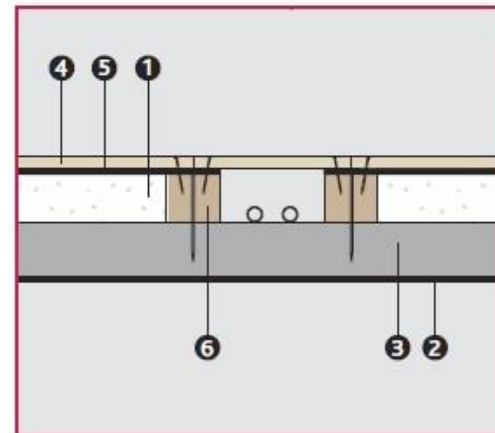

1. Jabfloor
2. Damp-proof membrane
3. Concrete slab
4. Chipboard
5. Vapour-control layer
6. Treated timber batten

Doorways

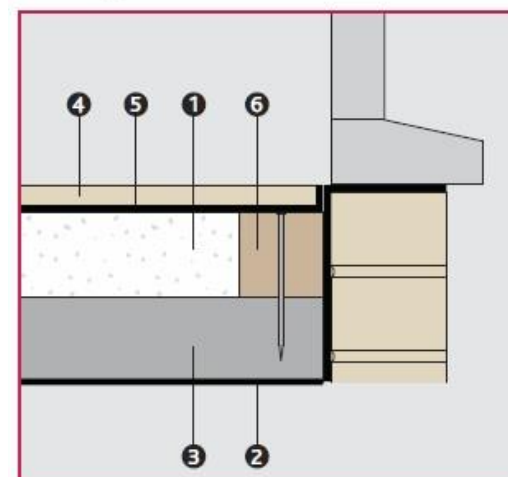

1. Jabfloor
2. Damp-proof membrane
3. Concrete slab
4. Chipboard
5. Vapour-control layer
6. Treated timber batten






INSTALLATION

Partitions etc...

Where masonry partitions or other heavy structures are to be built directly onto the chipboard floor, the insulation should be interrupted and a solid batten provided along the line of the partition, beneath the chipboard, to provide support.

The batten should be of preservative-treated timber, securely attached to the concrete slab using masonry nails or screws and plugs.

Partitions

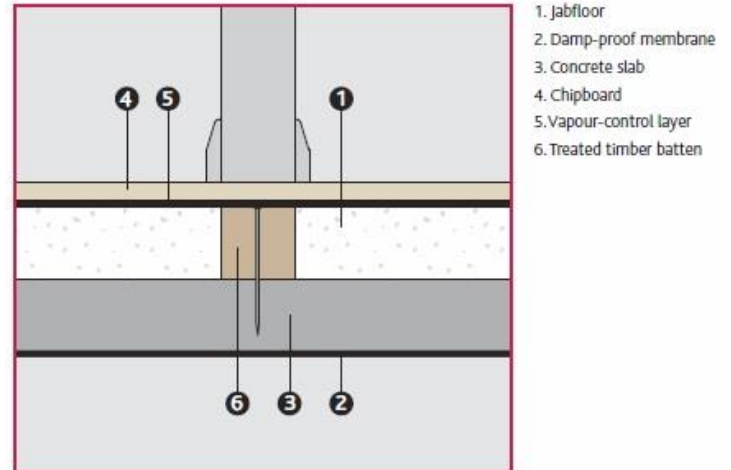

Other timber floor finishes

Timber panels such as plywood or OSB may be used over Jabfloor. Any timber floor panel used must have tongued and grooved edges glued together.

The specification for thickness and type of timber finish will vary dependent on the type building and its use.

Please refer to BS EN 312 for specification of chipboards, BS EN 636 for plywood and BS EN 300 for OSB (Oriented Strand Board).

Wood strip flooring and timber laminate floors, even where they have a tongued and grooved edges or 'click' together detail must be placed over a solid panel such as chipboard, plywood or OSB.

You should seek the advice of the flooring manufacturer regarding any specific requirements, otherwise it may be treated as a normal decorative finish when placed over a standard timber panel floor as detailed above.





Table 4.1:

	U-values: $0.25 W/m^2K$			
P/A Ratio	Jabfloor 70	Jabfloor 100	Jabfloor 150	Jabfloor 200 & 250
1.00	105	100	95	95
0.90	105	100	95	95
0.80	100	95	90	90
0.70	95	90	90	85
0.60	90	85	85	80
0.50	85	80	75	75
0.40	75	70	70	65
0.30	60	55	55	55
0.25	50	50	50	40
0.20	30	30	25	25
0.15	25	25	25	25

Table 4.2:

	U-values: $0.22 W/m^2K$			
P/A Ratio	Jabfloor 70	Jabfloor 100	Jabfloor 150	Jabfloor 200 & 250
1.00	130	120	120	115
0.90	125	115	115	115
0.80	120	115	115	110
0.70	120	110	110	105
0.60	110	105	105	100
0.50	105	100	95	95
0.40	95	90	85	85
0.30	80	75	75	70
0.25	65	65	60	60
0.20	50	50	50	50
0.15	25	25	25	25





Table 4.3:

	U-values: 0.20 W/m ² K			
P/A Ratio	Jabfloor 70	Jabfloor 100	Jabfloor 150	Jabfloor 200 & 250
1.00	150	135	135	130
0.90	140	135	130	125
0.80	140	130	125	125
0.70	135	125	120	120
0.60	130	120	115	115
0.50	120	115	110	110
0.40	110	105	100	100
0.30	95	90	90	85
0.25	85	80	75	75
0.20	65	60	60	60
0.15	40	40	40	40

Table 4.4:

	U-values: 0.18 W/m ² K			
P/A Ratio	Jabfloor 70	Jabfloor 100	Jabfloor 150	Jabfloor 200 & 250
1.00	170	160	150	145
0.90	160	160	150	145
0.80	160	150	145	140
0.70	160	145	140	140
0.60	150	140	135	135
0.50	140	135	130	125
0.40	130	125	120	115
0.30	115	110	105	100
0.25	100	100	95	90
0.20	85	80	75	75
0.15	55	55	50	50





Table 4.5:

	U-values: $0.15 W/m^2K$			
P/A Ratio	Jabfloor 70	Jabfloor 100	Jabfloor 150	Jabfloor 200 & 250
1.00	210	195	190	190
0.90	200	190	190	180
0.80	200	190	190	180
0.70	195	190	180	175
0.60	190	180	175	170
0.50	180	170	170	160
0.40	170	160	160	150
0.30	150	140	140	135
0.25	140	130	130	125
0.20	120	115	110	110
0.15	90	85	80	80

Table 4.6:

	U-values: $0.10 W/m^2K$			
P/A Ratio	Jabfloor 70	Jabfloor 100	Jabfloor 150	Jabfloor 200 & 250
1.00	320	320	300	300
0.90	320	300	300	300
0.80	320	300	300	300
0.70	320	300	300	300
0.60	320	300	300	275
0.50	300	300	275	270
0.40	300	275	270	270
0.30	270	260	250	240
0.25	250	240	230	225
0.20	230	220	210	210
0.15	200	190	190	180

