

# Probond Tape

## DESCRIPTION


Probond Tape is an extruded butyl tape for use in sealing overlaps in vapour control layers and providing a temporary fix to substrates prior to mechanical fixing.

Probond Tape has good adhesion to a wide range of substrates. The softer composition makes Probond Tape highly conformable and has good UV resistance.

It is easy to use with little waste and no mess and remains flexible throughout its service life.

## PHYSICAL PROPERTIES

Property	Test Method	Mean Results
Roll size	-	15mm x 22.5m
Thickness	-	2mm
Colour	-	Grey
Dynamic Tensile Adhesion	H5	18N/cm <sup>2</sup>
Dynamic Shear Adhesion	H15	14N/cm <sup>2</sup>
90° Peel Adhesion	H48	7N/cm
180° Peel Adhesion	H41	11N/cm
Specific Gravity	H6	1.65g/cm <sup>3</sup>
Moisture Vapour Transmission Rate	ISO9932 / BS ISO 15106	0.24 g/m <sup>2</sup> /24hr/mm
Service Temperature Range	-	-40 to +90°C
Application temperature		5°C to +40°C

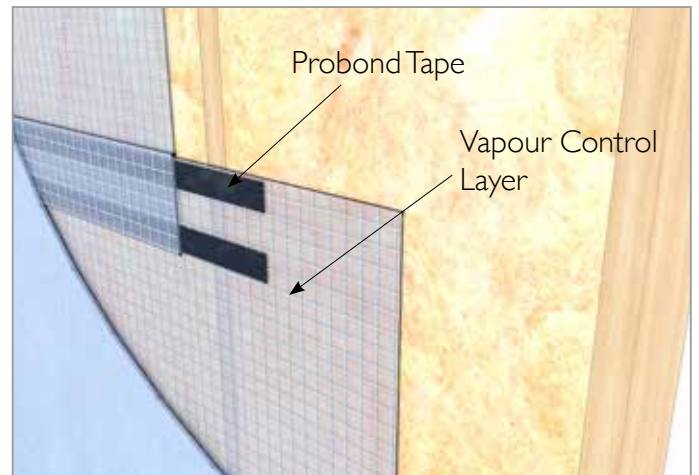

## KEY BENEFITS

- Good adhesion to a wide range of substrates
- Good UV resistance
- Easy and accurate to use with little waste and no mess
- The softer composition makes this product highly conformable
- High tack
- Remains flexible throughout its service life



Visit our website...

[www.proctorgroup.com](http://www.proctorgroup.com)

contact@proctorgroup.com | +44 (0) 1250 872261

Revised October 2022

