


## DECKfon<sup>®</sup> 17T, 26T & 30T

Composite Acoustic Overlay Floorboards for Refurb and Conversion Applications

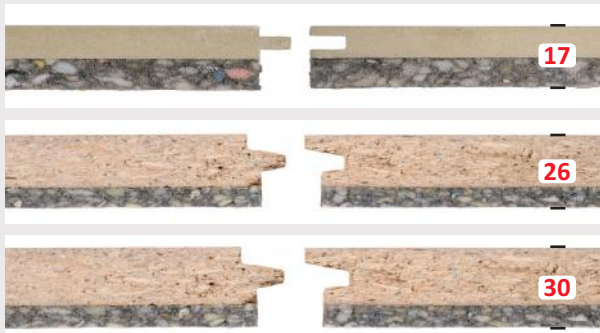

### Product Information

DECKfon<sup>®</sup> composite overlays are the ideal acoustic treatment to improve the performance of an existing structural timber decked floor. All three treatments combine a tongue and groove timber floorboard with a low resonance, flexible resilient foam.

### Product Benefits

- Excellent acoustic performance
- Three thickness' available: 17, 26 & 30mm
- Moisture resistant T & G floorboard
- Recycled resilient layer
- Quick and easy to install

### Technical Data

		DECKfon <sup>®</sup>		
		17T	26T	30T
Product description	-	Acoustic overlay floorboard	Acoustic overlay floorboard	Acoustic overlay floorboard
Overall thickness	mm	17	26	30
Type of facing board	-	9mm MR MDF	18mm P5 Chipboard	22mm P5 Chipboard
Resilient layer	-	8mm open-cell PU foam	8mm open-cell PU foam	8mm open-cell PU foam
Board dimensions	mm	600 x 2400	600 x 2400	600 x 2400
Weight	kg/m <sup>2</sup> kg/board	7.25 10.44	13.80 19.87	16.00 23.04
Associated flanking strip required	-	YELOfon ES5/60	YELOfon FS30	YELOfon FS30

### Third Party Accreditation and Approvals



### Environmental Credentials

